

## HM1520LF

### Relative Humidity Module

#### Specifications

- Tubular form for through wall mounting
- Product free from Lead, Cr(6+), Cd and Hg
- Calibrated, linear voltage for easy electronic interface
- Typical 1 to 1.6 Volt DC output for 0 to 20% RH at 5Vdc supply
- Ratiometric to voltage supply
- Patented solid polymer structure

Based on the rugged HS1101LF capacitive humidity sensor, HM1520LF is a dedicated humidity transducer designed for measurements at low humidity. Direct measurement of dew point or water concentration can be easily obtained in really cost effective conditions. Direct interface with a micro-controller is made possible with the module's linear voltage output

#### Features

- Full interchangeability
- Not affected by water immersion
- Controlled temperature dependency

#### **Humidity Sensor Specific features**

Not affected by long period at low humidity values  
High resistance to chemical  
Fast response time

#### Applications

- Low Humidity
- Meteorology




Performance Specs

**MAXIMUM RATINGS**

Ratings	Symbol	Value	Unit
Storage Temperature	Tstg	-30 to 70	°C
Storage Humidity	RHstg	0 to 100	% RH
Supply Voltage (Peak)	Vs	10	Vdc
Humidity Operating Range	RH	0 to 100	% RH
Temperature Operating Range	Ta	-40 to 60	°C

Peak conditions: less than 10% of the operating time.

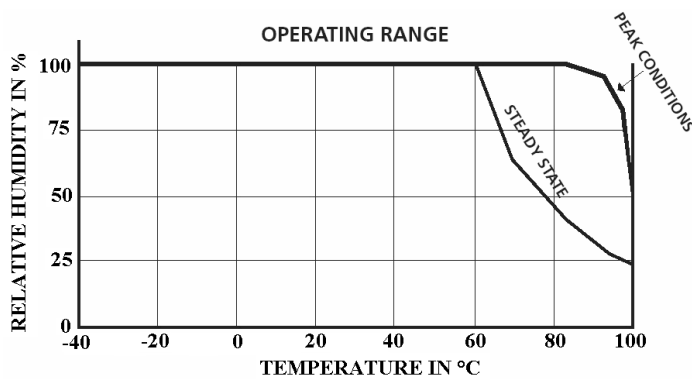

**ELECTRICAL CHARACTERISTICS**

(Ta=23°C, Vs=5Vdc +/-5%, RL>1MΩ unless otherwise stated)


Humidity Characteristics	Symbol	Min	Typ	Max	Unit
Humidity Measuring Range / Ta -40 to 60°C	RH	0		100	%RH
Relative Humidity Accuracy (1 to 20% RH) at 23°C	RH		+/-2	+/-3	%RH
Relative Humidity Accuracy @55% RH at 23°C	RH		+/-5		%RH
Supply Voltage (regulated at 5Vdc*)	Vs	4.75	5	5.25	Vdc
Nominal Output @10%RH (Ta = 25°C)	Vout	1.17	1.24	1.31	V
Current Consumption	Ic		1.4	2	mA
Temperature Coefficient (10 to 50°C and 1 to 20% RH)	Tcc		- 0.05	-0.1	%RH/°C
Humidity Average Sensitivity from 5% to 10%RH	$\Delta V_{out}/\Delta RH$		+26		mV/%RH
Sink Current Capability (RL=33kΩ)	Is			150	μA
Humidity Hysteresis				+/-1	%RH
Time Constant (at 63% of signal, static) 5% to 10%RH	$\tau$			10	s
Warm Up Time (electronic)	tw		150		ms
Humidity Resolution			0.4		%RH
Long Term Stability			0.5		%RH/yr
Output Impedance	Z		70		Ω

\*Maximum power supply ramp up time to Vcc should be less than 4ms

Typical Performance Curves

HUMIDITY SENSOR

- HM1520LF Preliminary Specification when used from 1 to 30% RH

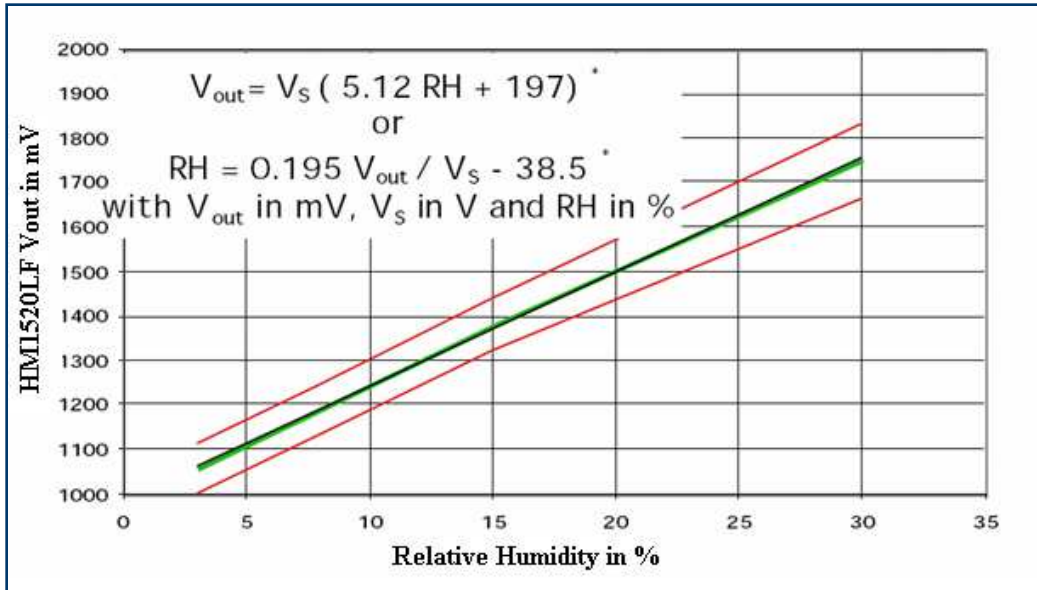

- Those equations can be used above 30% RH and allow to obtain an over all accuracy as described in page 4 of this document in all humidity measuring range.
- Temperature (in the range 0 to 50°C) does not affect HM1520LF measurement when used from 1% to 30% RH. No temperature compensation is required

- Signal output from 1% to 20% RH at 23°C

<b>RH (%)</b>	<b>1</b>	<b>2</b>	<b>3</b>	<b>4</b>	<b>5</b>	<b>6</b>	<b>7</b>	<b>8</b>	<b>9</b>	<b>10</b>
<b>Vout (mV)</b>	1013	1038	1064	1089	1115	1141	1166	1192	1217	1243
<b>RH (%)</b>	<b>11</b>	<b>12</b>	<b>13</b>	<b>14</b>	<b>15</b>	<b>16</b>	<b>17</b>	<b>18</b>	<b>19</b>	<b>20</b>
<b>Vout (mV)</b>	1269	1294	1320	1346	1371	1397	1422	1448	1474	1499

With  $V_s = 5.0$  Volts DC

Calibration data are **traceable to NIST** standards through CETIAT laboratory.

**IMPORTANT NOTICE : HM1520LF is based on HS1101LF capacitive sensor and thus is fully useable on a large range of relative humidity (1% to 99% RH). In that range, HM1520LF presents a typical accuracy of +/- 5% RH at 55% RH.)**

However HM1520LF is a dedicated module for humidity measurements at low Relative Humidity levels.

Thus, HM1520LF is also well adapted to measure water concentrations (ppm) or low dew points when associated with an ambient temperature probe.

## HM1520LF

Relative Humidity Module

HM1520LF features an optimized accuracy for **water concentration below 6000 ppm water or 0°C dew point at 23°C** (equivalent to 20% RH).

- **Typical Output of HM1520LF when measuring water concentration at ambient temperature of 23°C**


<b>ppm</b>	275	550	825	1100	1375	1650	1925	2200	2470	2750
<b>Vout (mV)</b>	1013	1038	1064	1089	1115	1141	1166	1192	1217	1243
<b>ppm</b>	3025	3300	3570	3850	4120	4395	4670	4945	5220	5495
<b>Vout (mV)</b>	1269	1294	1320	1346	1371	1397	1422	1448	1474	1499

$$\text{ppm}_{\text{water}} = 10.75 V_{\text{out}} - 10615 \text{ with } V_{\text{out}} \text{ in mV}$$

- **Typical Output of HM1520LF when measuring dew point at ambient temperature of 23°C**

<b>DP (°C)</b>	-36	-29	-24	-21	-18.5	-16	-14.5	-13	-11.5	-10
<b>Vout (mV)</b>	1013	1038	1064	1089	1115	1141	1166	1192	1217	1243
<b>DP (°C)</b>	-9	-7.8	-6.8	-5.8	-4.9	-4.1	-3.2	-2.5	-1.6	-1.1
<b>Vout (mV)</b>	1269	1294	1320	1346	1371	1397	1422	1448	1474	1499

- **Accuracy of HM1520LF when used from 1% to 95% RH**

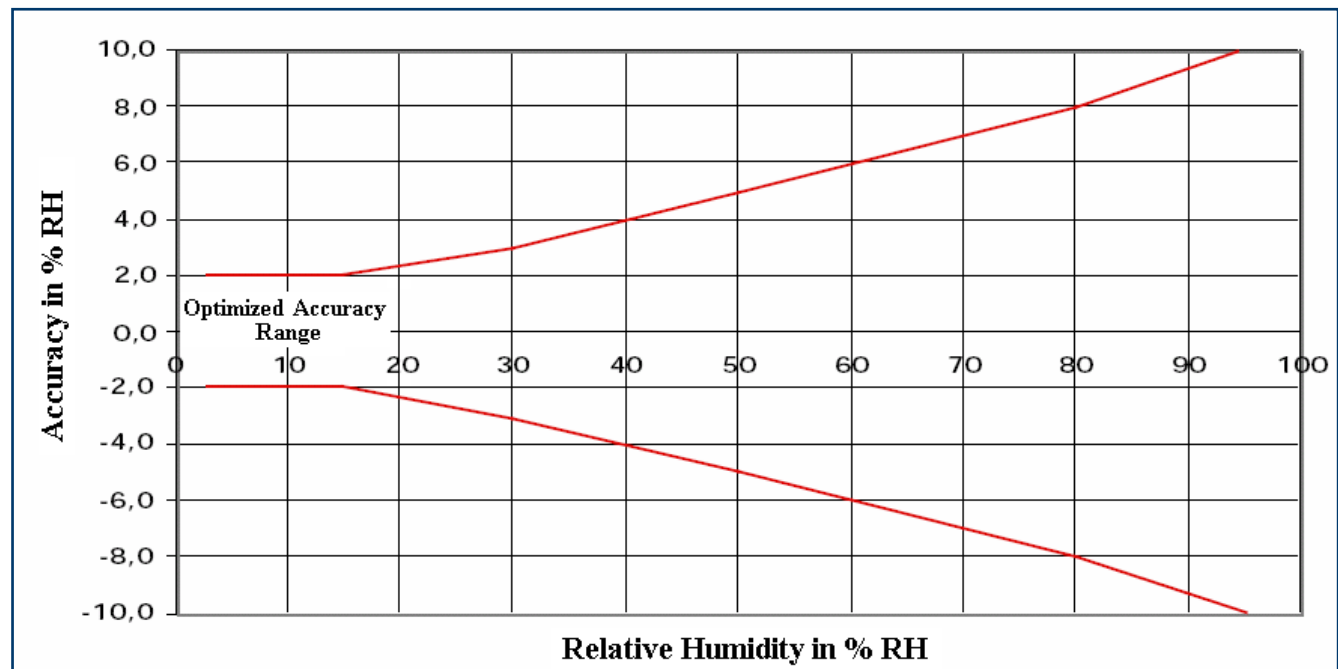

## Qualification Process


### RESISTANCE TO PHYSICAL AND CHEMICAL STRESSES

- HM1520LF has passed through qualification processes of MEAS-FRANCE including vibration, shock, storage, high temperature and humidity, ESD.
- Additional tests under harsh chemical conditions demonstrate good operation in presence of salt atmosphere, SO<sub>2</sub> (0.5%), H<sub>2</sub>S (0.5%), O<sub>3</sub>, NO<sub>x</sub>, NO, CO, CO<sub>2</sub>, Softener, Soap, Toluene, acids (H<sub>2</sub>SO<sub>4</sub>, HNO<sub>3</sub>, HCl), HMDS, Insecticide, Cigarette smoke, this is not an exhaustive list.
- HM1520LF is not light sensitive.

### SPECIFIC PRECAUTIONS

- HM1520LF is protected against reversed polarity.
- If you wish to use HM1520LF in a chemical atmosphere not listed above, consult us.

## Package Outline

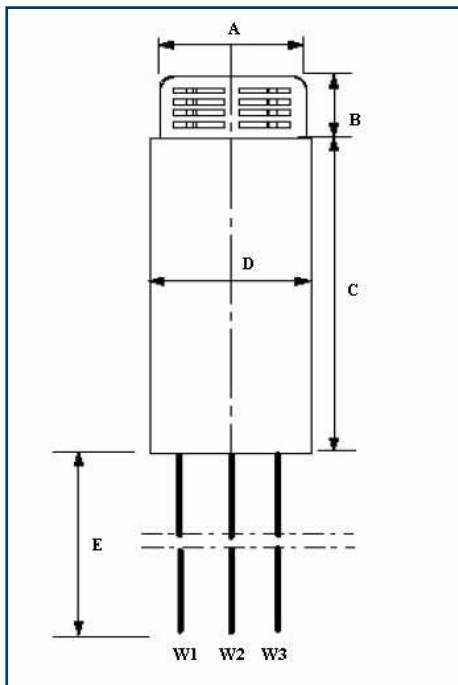

Dim	Min (mm)	Max (mm)
<b>A</b>	9.75	10.25
<b>B</b>	4.00	4.50
<b>C</b>	53	55
<b>D</b>	10.9	11.4
	200	250

*\* Specific length available on request*

Wire	Color	Function
<b>W1</b>	White	Ground
<b>W2</b>	Blue	Supply Voltage
<b>W3</b>	Yellow	Humidity Output Voltage

## HM1520LF

Relative Humidity Module

---

### Ordering Information

HPP805C031 (MULTIPLE PACKAGE QUANTITY OF 10 PIECES)  
HM1520LF – HUMIDITY ANALOG VOLTAGE OUTPUT MODULE

#### NORTH AMERICA

Measurement Specialties, Inc.,  
a TE Connectivity Company  
Phone: +1-800-522-6752  
[customercare.hmpt@te.com](mailto:customercare.hmpt@te.com)

#### EUROPE

MEAS France(Europe)  
a TE Connectivity Company  
Phone: +31 73 624 6999  
[customercare.dtmtd@te.com](mailto:customercare.dtmtd@te.com)

#### ASIA

Measurement Specialties (China), Ltd.,  
a TE Connectivity Company  
Phone: +86-400-820-6015  
[customercare.shzn@te.com](mailto:customercare.shzn@te.com)

#### TE.com/sensorsolutions

Measurement Specialties, Inc., a TE Connectivity company.

Measurement Specialties (MEAS), American Sensor Technologies (AST), TE Connectivity, TE Connectivity (logo) and EVERY CONNECTION COUNTS are trademarks. All other logos, products and/or company names referred to herein might be trademarks of their respective owners.

The information given herein, including drawings, illustrations and schematics which are intended for illustration purposes only, is believed to be reliable. However, TE Connectivity makes no warranties as to its accuracy or completeness and disclaims any liability in connection with its use. TE Connectivity's obligations shall only be as set forth in TE Connectivity's Standard Terms and Conditions of Sale for this product and in no case will TE Connectivity be liable for any incidental, indirect or consequential damages arising out of the sale, resale, use or misuse of the product. Users of TE Connectivity products should make their own evaluation to determine the suitability of each such product for the specific application.

© 2017 TE Connectivity Ltd. family of companies All Rights Reserved.