
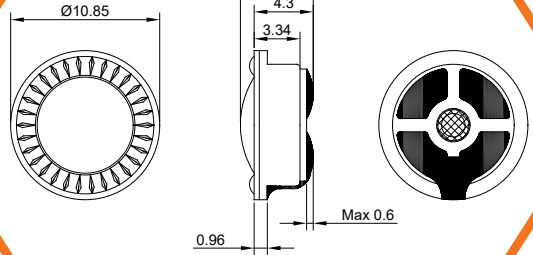



SoniCrest SPEAKER SOUND GENERATORS

A8-SR1



Dimensions

Unit : mm
Tolerance : ± 0.3 mm

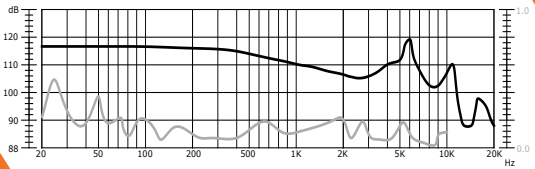

Frequency Response

Applied Voltage: 1mW, Sine Wave
Based on IEC-R318 Standard

Specification (all data taken at 25°C unless otherwise specified)

Coil Impedance (Ω)	Rated Power (mW)	Maximum Input Power (mW)	*Sensitivity at 1KHz (dB)	*Frequency Range (Hz)	Total Harmonic Distortion (Hz)	Operating Temperature ($^{\circ}$ C)	Storage Temperature ($^{\circ}$ C)
32 \pm 15%	5	10	110 \pm 3	20 ~ 10000	<1%	-20 ~ +50	-20 ~ +50

A8-SR1

The specification are only for 32 Ω version. Specification for other impedance is available upon request.
*Value applied: 1mW input power, based on IEC-R318 standard.