

SoniCrest Microphones


HBO0403G-66S

- SMT
- Reflow Compatible
- Back Electret Condenser Microphone

Frequency Response

Applied Voltage $V_s = 3V$


Load Resistance $R_L = 2.2k\Omega$

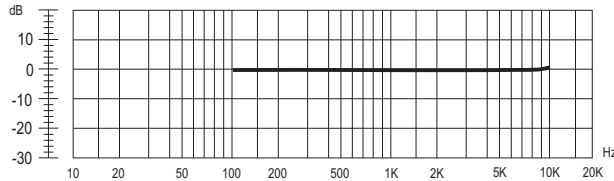

Dimension

Unit : mm

Tolerance : $\pm 0.3mm$

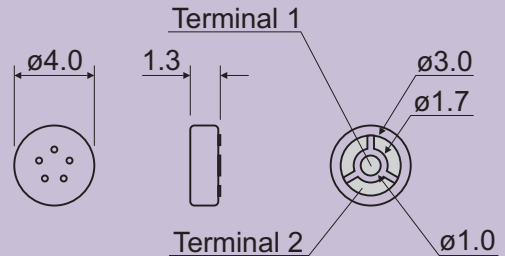

Specification (all data taken at 25°C unless otherwise specified)

Model	Directivity	★Sensitivity (dB)	Rated Voltage (V)	Maximum Operating Voltage (V)	Current Consumption (mA)	Frequency Range (Hz)	Impedance (Ω)	S/N Ratio (dB)
HBO0403G-66S	Omnidirectional	-46 \pm 3	3	10	≤ 0.5	100 ~ 10000	Low	≥ 60

★ Condition : 0dB = 1V/pa, 1kHz, Different sensitivity level is available upon request.