
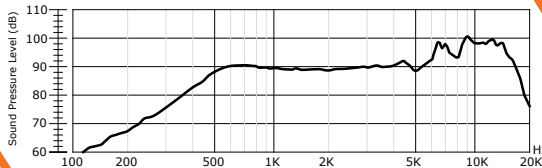


# SoniCrest SPEAKER SOUND GENERATORS

## HSB2030D

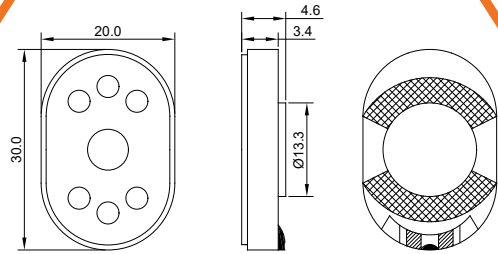

### Dimensions

Unit : mm  
Tolerance :  $\pm 0.3$ mm

### Frequency Response

Normalization to 0.1W Input Power and  
0.1m Measuring Distance

**Specification** (all data taken at 25°C unless otherwise specified)

Coil Impedance ( $\Omega$ )	Rated Power (W)	Maximum Input Power (W)	Resonance Frequency (Hz)	*Frequency Range (Hz)	*Average Sound Pressure Level (dB)	Operating Temperature ( $^{\circ}$ C)	Storage Temperature ( $^{\circ}$ C)
$8 \pm 15\%$	1	1.5	$600 \pm 20\%$	600 ~ 20000	$88 \pm 3$	-20 ~ +60	-30 ~ +70

HSB2030D-8

The specification are only for 8 $\Omega$  version. Specification for other impedance is available upon request.

\*Value normalized to 0.1W input power and 0.1m measuring distance.