
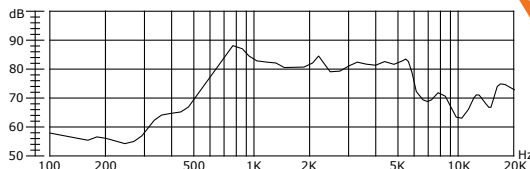




SoniCrest SPEAKER SOUND GENERATORS

HSB28M



Dimensions

Unit : mm

Tolerance : ± 0.3 mm

Frequency Response

Normalization to 1W Input Power
and 1m Measuring Distance

Specification (all data taken at 25°C unless otherwise specified)

Coil Impedance (Ω)	Rated Power (W)	Maximum Input Power (W)	Resonance Frequency (Hz)	*Frequency Range (Hz)	*Average Sound Pressure Level (dB)	Operating Temperature ($^{\circ}\text{C}$)	Storage Temperature ($^{\circ}\text{C}$)
$8 \pm 15\%$	1.0	1.5	$700 \pm 20\%$	700 ~ 6000	83 ± 3	-20 ~ +60	-30 ~ +70

HSB28M-8

The specification are only for 8 Ω version. Specification for other impedance is available upon request.
*Value normalized to 1W input power and 1m measuring distance.