
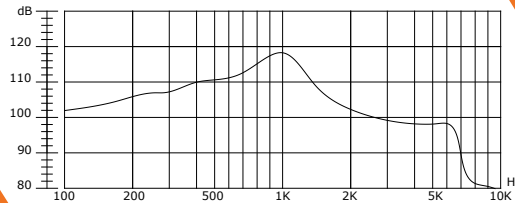


# SoniCrest SPEAKER SOUND GENERATORS

## HSR10X

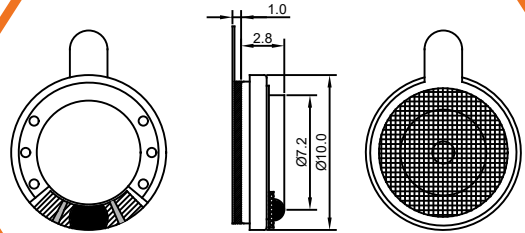

### Dimensions

Unit : mm  
Tolerance :  $\pm 0.3$ mm

### Frequency Response

Applied Signal: 180mV, Sine Wave  
Based on IEC-R318 Standard

**Specification** (all data taken at 25°C unless otherwise specified)

Coil Impedance ( $\Omega$ )	Rated Power (mW)	Maximum Input Power (mW)	*Sensitivity at 1KHz (dB)	*Frequency Range (Hz)	Total Harmonic Distortion (Hz)	Operating Temperature ( $^{\circ}$ C)	Storage Temperature ( $^{\circ}$ C)
32 $\pm$ 15%	5	10	117 $\pm$ 3	300 ~ 4000	<5%	-20 ~ +60	-30 ~ +70

HSR10X-32

The specification are only for 32 $\Omega$  version. Specification for other impedance is available upon request.  
\*Value applied: 180mV input power, based on IEC-R318 standard.