
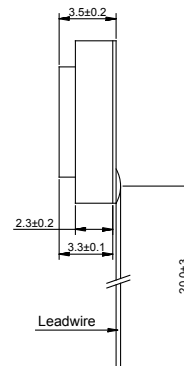



SoniCrest SPEAKER SOUND GENERATORS


SXT05A



Dimensions

Unit : mm

Tolerance : ± 0.3 mm

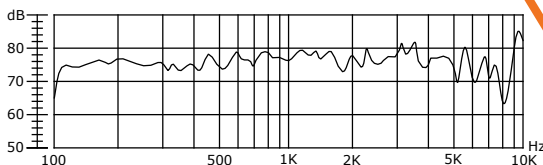

Frequency Response

Normalization to 1W Input Power
and 0.1m Measuring Distance

Specification (all data taken at 25°C unless otherwise specified)

Coil Impedance (Ω)	Rated Power (W)	Maximum Input Power (W)	Resonance Frequency (Hz)	Frequency Range (Hz)	*Sound Pressure Level at 1KHz (dB)	Operating Temperature ($^{\circ}$ C)	Storage Temperature ($^{\circ}$ C)
$4 \pm 10\%$	0.5	1	$800 \pm 20\%$	800 ~ 15000	76 ± 3	-20 ~ +55	-20 ~ +70

SXT05A-4

The specification are only for 4 Ω version. Specification for other impedance is available upon request.
*Value normalized to 1W input power and 0.1m measuring distance. Tested on 135 x 69mm fiberboard.