


CO / CO₂ / C_nH_m / N₂O

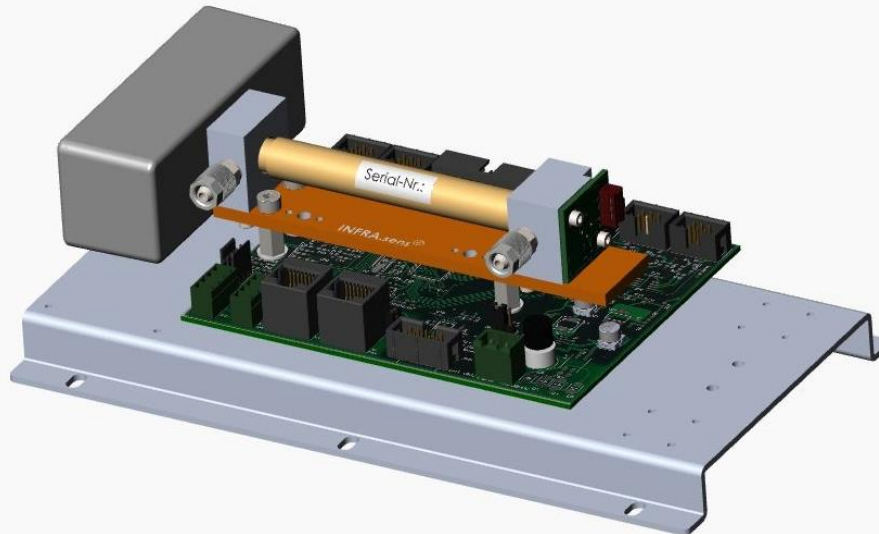

INFRA.sens® AK100G

Applications

- > OEM gas module
- > Industrial gas analyzer
- > Environmental monitoring
- > Process control
- > Instrumentation

Features & Benefits

- > High dynamic range
- > Rugged sensor design
- > Gas tight O-ring sealing
- > Low power consumption <1W @ 24V
- > Different Interfaces (RS232, CANbus)

Description

The gas analysis based on the NDIR technique is an established method to determine the concentrations in complex gas mixtures. The **INFRA.sens®** module uses novel optical components for optimum analysis results. The individual modules are sealed by means of O-ring connections. The gold coated sample cell length is set to 100mm.

Options

- > O2.sens (Oxygen sensor)
- > P.sens (Pressure sensor)
- > HUMI.sens® (Humidity sensor)
- > Thermobox
- > Analogboard (0-10V)

Accessories

- > MARS Tool (Control and data logging)



For more and most recent information please have a look on our website at www.witec-sensorik.de/en/

INFRA.sens® AK100G

CO / CO₂ / C_nH_m / N₂O

	gas channel 1*	gas channel 2*	gas channel 3*	Option**		
Single Gas Module	CO / CO ₂ / C _n H _m / CH ₄ / N ₂ O			O ₂	P	H
Dual Gas Module	CO		CO ₂ / C _n H _m / CH ₄ / N ₂ O	O ₂	P	H
		CO ₂	CO ₂ / C _n H _m / CH ₄ / N ₂ O	O ₂	P	H
Triple Gas Module	CO	CO ₂	CO ₂ / C _n H _m / CH ₄ / N ₂ O	O ₂	P	H

* one gas per column selectable

** P = pressure sensor, H = humidity sensor

List of measurement ranges

Measuring range*	CO	CO ₂	CH ₄	C _n H _m	N ₂ O
100Vol.%		✓			
50Vol.%		✓			
30Vol.%					
20Vol.%		✓			
10Vol.%		✓			
5Vol.%		✓	✓	✓	
1Vol.%	✓	✓	✓	✓	
5000ppm	✓	✓	✓	✓	
2000ppm	✓	✓			✓
1000ppm					
500ppm					
300ppm					
100ppm					
50ppm					
10ppm					

* Full scale value (F.S.)

For other measuring ranges please refer to our further datasheet
other gas components on request



THE GAS MEASUREMENT COMPANY

!CAUSE IT MAKES .SENS

Subject to change without notice. // 2020-09 Rev.02

INFRA.sens® AK100G

CO / CO₂ / C_nH_m / N₂O

General features	
Measurement principle	NDIR
Measurement range	see list of measurement ranges
Gas flow	0.1 – 1.5 l/min
Dimensions	225mm x 120mm x 75mm
Weight	approx. 520g
Tube connector	4/6mm tube
Lifetime of IR radiation source	> 40 000h
Measuring response ¹	
Warm-up time	1 min (initial), <10 min ²
Response time(t ₉₀)	1.5s – 15s ³
Detection limit (2·σ)	≤ 0.5% F.S. [>200ppm]; <1%F.S. [<200ppm] ⁴
Linearity error	< ± 1% F.S.
Repeatability	± 0.5% F.S.
Long term stability (zero)	< ± 2% F.S./week
Long term stability (span)	< ± 2% F.S./month
Temp. Influence zero	< 1% F.S./10K
Temp. Influence span	< 1% F.S./10K ⁵
Cross sensitivity	max. 2% F.S. ⁶
Pressure influence	< 1.5%/10hPa of reading ⁷
Electrical inputs and outputs	
Supply voltage	24 (15 – 30) VDC
Average power consumption	< 1W
Digital output signal	RS 232 (ASCII) or CAN bus
Climatic conditions	
Operating temperature	15 – 45 °C
Storage temperature	-20 – 60 °C
Air pressure	800 – 1200 hPa (mbar)
Ambient humidity	0 – 95% rel. humidity (not condensing)

F.S. full scale

¹ related to P_a = 1020hPa ; T_a = 25°C; flow = 1l/min

² full specification; demands to environmental conditions

³ depends on digital filter settings

⁴ at zero point

⁵ with span temperature compensation

⁶ to each calibrated gas channel

⁷ without pressure compensation



THE GAS MEASUREMENT COMPANY

!CAUSE IT MAKES .SENS

Subject to change without notice. // 2020-09 Rev.02