

Product Data Sheet (Draft)

Product Datasheet

AQ3OZ Ozone Sensor Module

Document Purpose

The purpose of this document is to present the performance specification of AQ3OZ Ozone gas sensor with mV output.

This document should be used in conjunction with Operating Principles (OP22) and the Product Safety Datasheet (PSDS 5).

The data provided in this document are valid at 20°C, 50% RH and 1013 mBar for 3 months from the date of sensor manufacture.

Output signal can drift below the lower limit over time. For guidance on the safe use of the sensor, please refer to the Operating Principles (OP22).

Product Data Sheet (Draft)

Key Features & Benefits

- Robust 3-Series packaging
- Algorithm used for mV compensation of environmental changes

Technical Specifications

MEASUREMENT

Sensor Type Used	AQ3OZ
Measurement Range	0-1 ppm O3
Maximum Overload	1.5 ppm
Filter	None
Sensitivity*	1.20 ± 0.50 mV/ppb
Response Time (T₉₀)*	≤120 seconds
Baseline Offset (clean air)*	≤ ± 80 mV
Maximum Zero Shift (+20°C to +40°C)	0.1 ppm equiv.
Resolution	10 ppb
Repeatability	<2% of signal
Linearity	Linear

ELECTRICAL

Power Supply Required	5 VDC
Power Consumption	350 µA @ 5VDC

MECHANICAL

Weight	30 g nominal
Body Material	Polycarbonate (Sensor)
Position Sensitivity	None


ENVIRONMENTAL

Typical Applications	Ambient Environmental Monitoring
Operating Temperature Range	-30°C to +50°C
Recommended Storage Temp	0°C to 20°C
Operating Pressure Range	Atmospheric ± 10%
Operating Humidity Range	15 - 90% RH non-condensing

LIFETIME

Long Term Sensitivity Drift	< 10% signal loss/year
Expected Operating Life	Two years in air
Storage Life	6 months in CTL container
Warranty	1 year

Product Dimensions

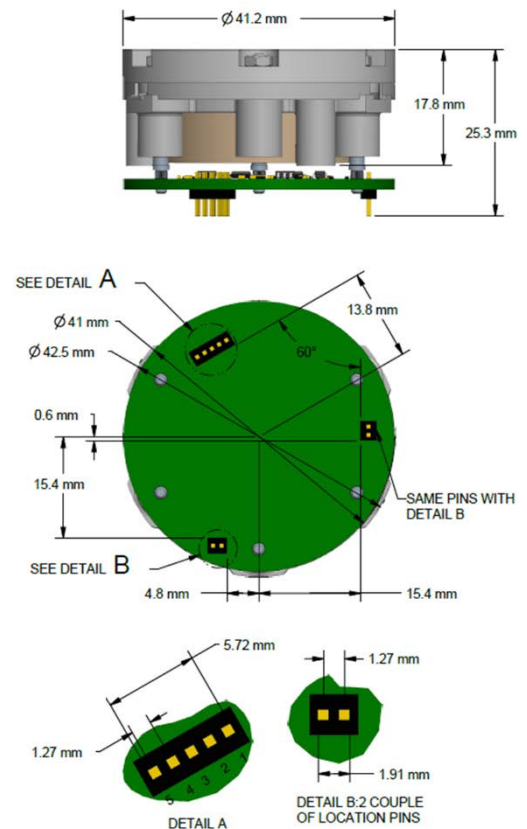

All dimensions in mm

All tolerances ±0.15 mm unless otherwise stated

Pin Definition

1	Vin(4.8~5.5V)
2	GND
3	Aux
4	GND
5	Sensing

*** Specifications are valid at 20°C, 50% RH and 1013 mBar, using City Technology recommended circuitry. Performance characteristics outline the performance of sensors supplied within the first 3 months. Output signal can drift below the lower limit over time.**

Product Data Sheet (Draft)

Poisoning

EnviroceLs are designed for operation in a wide range of environments and harsh conditions. However, it is important that exposure to high concentrations of solvent vapours is avoided, both during storage, fitting into instruments and operation.

When using sensors with printed circuit boards (PCBs), degreasing agents should be used before the sensor is fitted. Do not glue directly on or near the EnviroceL as the solvent may cause crazing of the plastic.

Cross Sensitivity Table

Whilst EnviroceLs are designed to be highly specific to the gas they are intended to measure, they will still respond to some degree to various other gases. The table below is not exclusive and other gases not included in the table may still cause a sensor to react.

IMPORTANT NOTE : The cross sensitivity data shown below does not form part of the product specification and is supplied for guidance only. Values quoted are based on tests conducted on a small number of sensors and any batch may show significant variation. For the most accurate measurements, an instrument should be calibrated using the gas under investigation.

Gas	Gas Concentration	Cross Interference
Carbon Monoxide, CO	5 ppm	None
Sulfur Dioxide, SO ₂	5 ppm	None
Nitrogen Dioxide, NO ₂	400 ppb	150%
Hydrogen Sulfide, H ₂ S	5 ppm	<20%

SAFETY NOTE

This sensor is designed to be used in safety critical applications. To ensure that the sensor and/or instrument in which it is used, are operating properly, it is a requirement that the function of the device is confirmed by exposure to target gas (bump check) before each use of the sensor and/or instrument. Failure to carry out such tests may jeopardize the safety of people and property.

Every effort has been made to ensure the accuracy of this document at the time of printing. In accordance with the company's policy of continued product improvement City Technology Limited reserves the right to make product changes without notice. The products are always subject to a programme of improvement and testing which may result in some changes in the characteristics quoted. As the products may be used by the client in circumstances beyond the knowledge and control of City Technology Limited, we cannot give any warranty as to the relevance of these particulars to an application. It is the clients' responsibility to carry out the necessary tests to determine the usefulness of the products and to ensure their safety of operation in a particular application.