

Plastic Mold Visible LEDs KED591M51A


■ Features

- Transparent epoxy mold
- Direct modulation

■ Applications

- Optical switches
- Optical instruments
- Automatic control apparatus

Dimensions

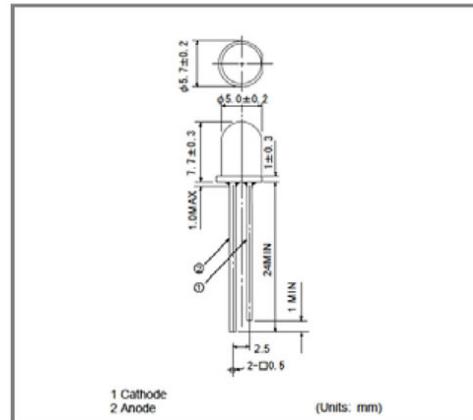

■ Specifications


● Absolute Maximum Ratings

Parameter	Symbol	Value	Unit	Conditions
Forward current	I _F	30	mA	T _a =25
Peak forward current	I _{FP}	0.3	A	Pulse width=100μs, Duty ratio=1%
Reverse voltage	V _R	5	V	
Collector dissipation	P _D	120	mW	
Operating temperature	T _{opr}	-20 to +80		Avoid dew condensation
Storage temperature	T _{stg}	-20 to +100		Avoid dew condensation


● Electrical and Optical characteristics

Parameter	Symbol	Value			Unit	Conditions
		Min.	Typ.	Max		
Forward voltage	V _F		2.2	2.5	V	I _F =20mA
Reverse Current	I _R			10	μA	V _R =5V
Luminous Intensity Iv	LV		2300		mcd	I _F =20mA
Optical output power	P _O		3.4		mW	I _F =20mA
Peak wavelength	λ		590		nm	I _F =20mA
Spectral width			15		nm	I _F =20mA
Half angle	2		36		deg	I _F =20mA


Allowable Forward Current – Ambient temperature

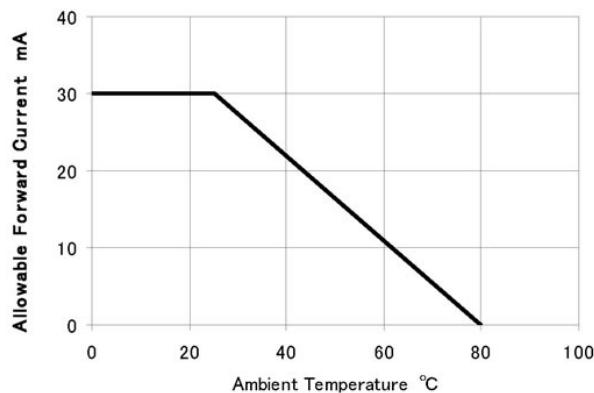


Optical Output Power – Forward Current ($T_a=25^\circ C$)

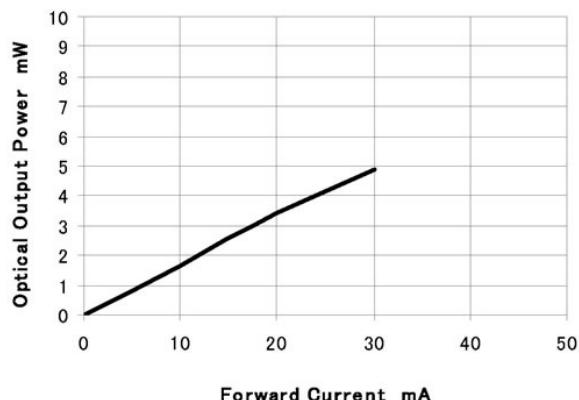


Forward Current – Forward Voltage ($T_a=25^\circ C$)

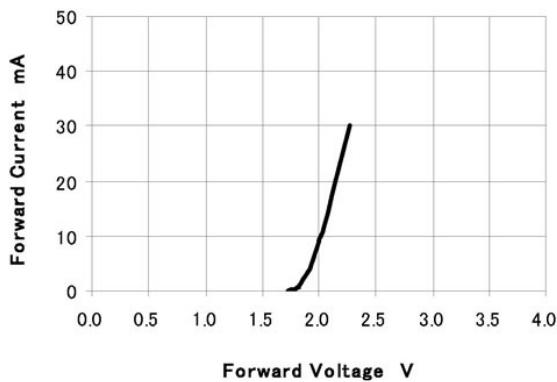

Relative Optical Output Power – Ambient Temperature

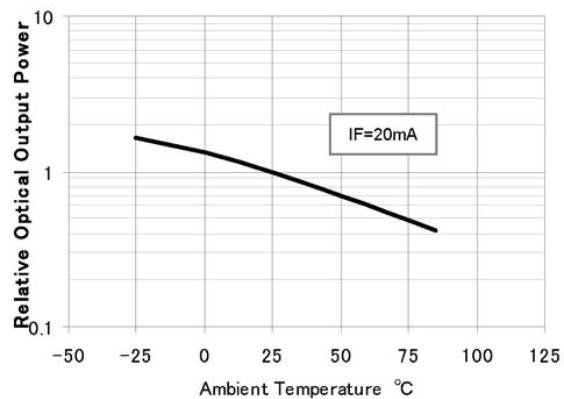

Spectral Distribution ($T_a=25^\circ C$, IF=20mA)

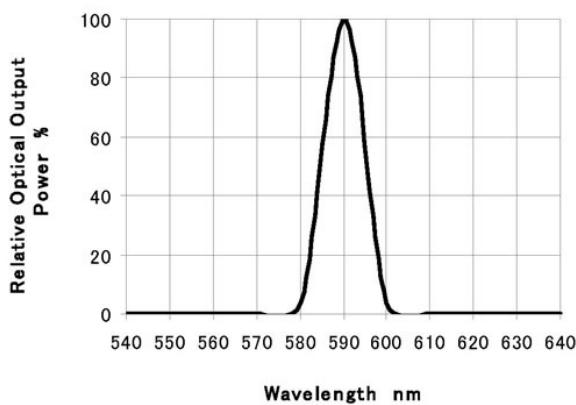

Directivity ($T_a=25^\circ C$)

